


# GPCK-ME SERIES MOTORIZED PROJECTOR LIFT

Smooth running  
Low noise ( $\leq 45\text{dB}$ )  
Precise positioning  
Durable  
Maximum load 25Kg

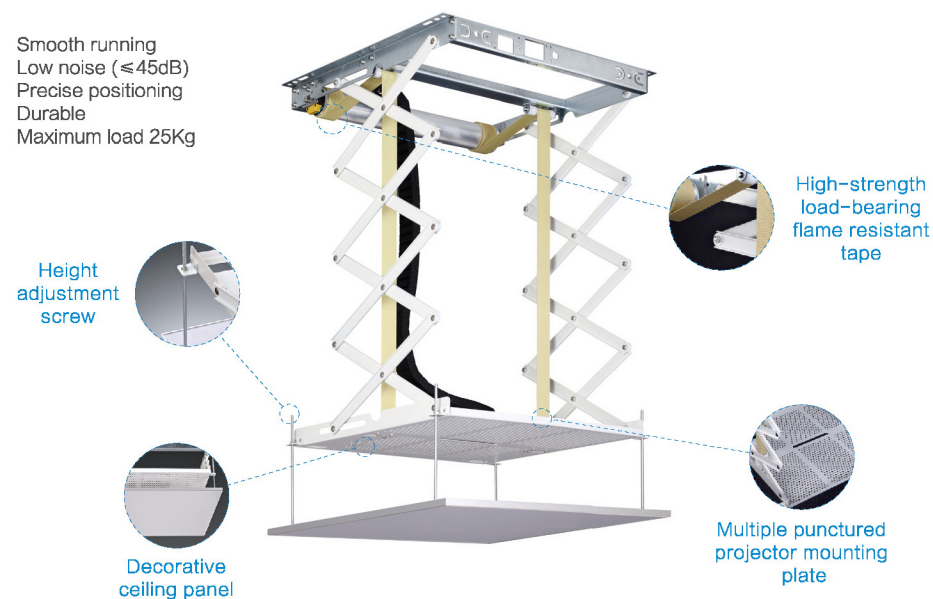

Applicable scene: It is widely used in various meeting rooms, multimedia classrooms, training rooms and other office places.

## Specification

Model	Lift Distance (mm)	Product Height H1 (mm)	Frame Height H5 (mm)	Usable Height H4 (mm)	Weight Capacity (kg)	Projector Maximum Size Reverse installed
GPCK-ME500	500	135	110	110	25	W500xD500xH200
GPCK-ME1000	1000	190	165	165	25	
GPCK-ME2000	2000	300	275	275	20	
GPCK-ME3000	3000	410	385	385	15	
GPCK-ME4000	4000	520	495	495	15	
GPCK-ME2000P	2000	300	275	275	25	W600xD600xH250
GPCK-ME3000P	3000	410	385	385	25	
GPCK-ME4000P	4000	520	495	495	25	
GPCK-ME5000P Plus	5000	760	735	735	80	W800xD800xH300
GPCK-ME6000P Plus	6000	815	790	790	80	

Note: 1. H1 is the data calculated when the trim height is raised to the minimum (H2=10mm).  
2. If the projector is upside down and over 200mm, the H2 height can be changed by using 4 lengthened screws.

