


Liberty HDMI V2.1 8K Active Optical Cable

TMDS signal, 100Mts transmission distance, 48Gbps, no signal attenuation, anti-EMI

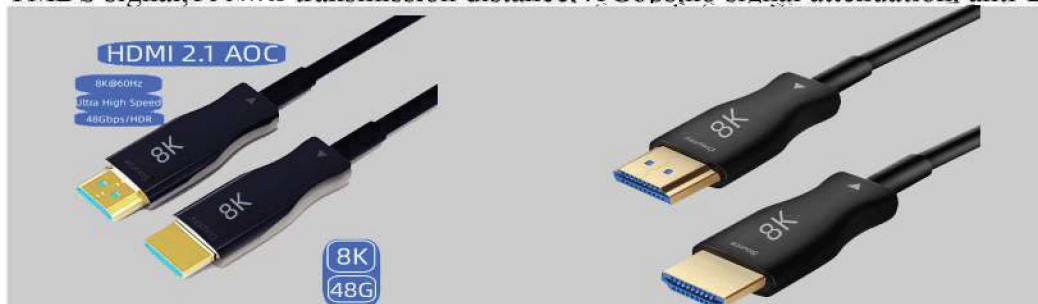

48Gbps | HDMI 2.1 | HDR | EMI

Name	HDMI 8K V2.1 Active Optical Cable
Model No.	GQ-19-401
Resolution	8K@60Hz, 4K@120Hz
Bandwidth	48Gbps
Chip	Imported photoelectric conversion chip
Color space	4:4:4 Max
Color depth	12 bit Max
Type	Male - Male
Core	4-core fiber + 7-core tinned copper
Outer diameter	5.2mm
Shell	Zinc alloy
Jacket	PVC, RoHS Directive-compliant
Power supply	No external power supply required, plug and play
Support	HDCP 2.2/HDR/EDID/DDC/3D/eARC
Power consumption.	250mW
Working temperature	-40°C~70°C


FEATURE

- 1, Compatible with all HDMI Standard devices.
- 2, Compliant with HDMI V2.1 version specification.
- 3, Four-core optical fiber transmits TMDS signals, Seven--core tinned copper transmits signaling protocol. Anti-electromagnetic interference, No attenuation.
- 4, Supports long transmission distance, the longest over 100 meters.
- 5, Photoelectric conversion chip to improve compatibility, stability and service life.
- 6, Plug and play, no need external power support, no drivers program required
- 7, Zinc alloy shell Anti-electromagnetic interference increase wear resistance and improve service life.
- 8, Compact zinc alloy shape, more suitable for pipe wiring.

SUPPORT



DETAILS

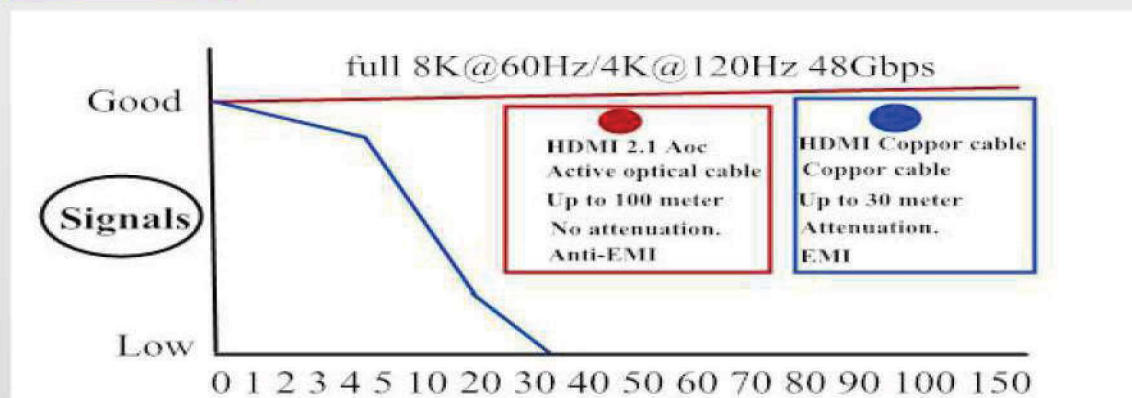

APPLICATION

eARC power HIFI sound
Multiple audio formats transmission
Bright sound really
More shock of audio-visual experience



AV-VISION
EQUIPMENTS (INDIA) PVT. LTD.

5.1/7.1
track

Dolby Atmos

Nondestructive
quality


8K Ultra HD image quality

Visual feast, More clear picture, More comfortable viewing



- 1, Large screen display multimedia display control system.
- 2, Remote flat-panel TV.
- 3, Medical image display.
- 4, large outdoor advertising screens.
- 5, Public security HD camera.
- 6, High-definition long-distance video conferencing.
- 7, Large poster. Home theater.
- 8, High-defintion digital bulletin board.
- 9, Family, school, monitoring, security.
- 10, Aviation aircraft video imaging system.
- 11, Splicing screen video display.

ENGINEERING DRAWING

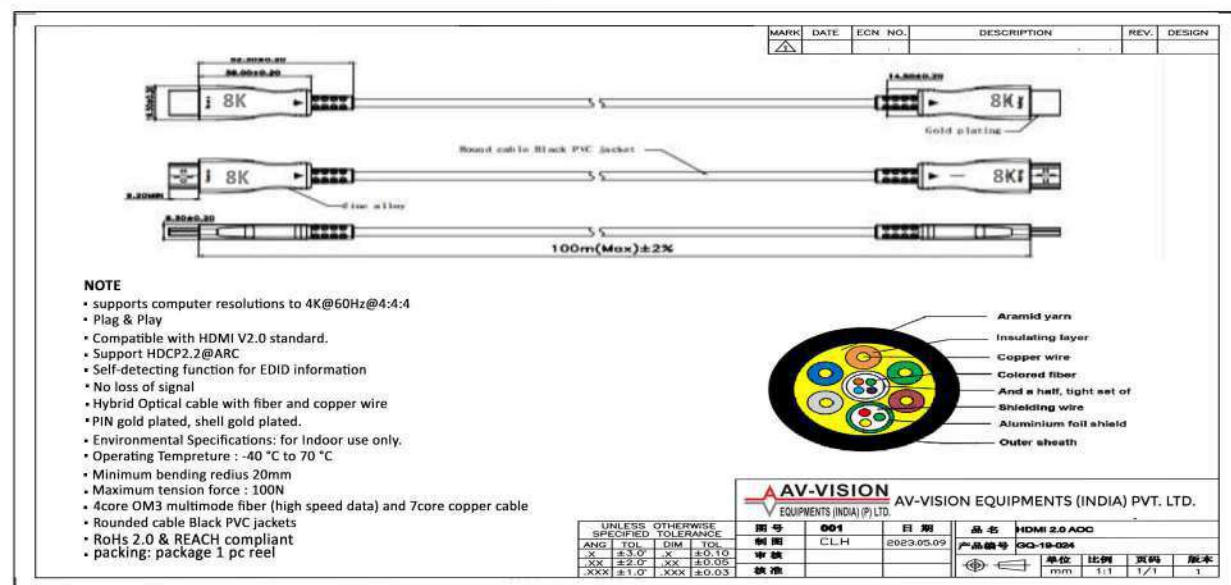

PACKING

Length	Weight/Pc(g)	OD Reel(mm)	Reel High(mm)	Reel Weight(g)	Box Sizes(mm)	Box Weight(g)	QTY/Bo(I)	Carton Sizes(mm)	Carton Weight(g)	Net Weight(g)	Gross Weight(g)
1.5Mts	60	180+200mm OPP bog + box			168+155+53	73	10	330+185+285	421	600	1751
5Mts	180	180+200mm OPP bog + box			168+155+53	73	10	330+185+285	421	1800	2951
10Mts	310	180+200mm OPP bog + box			168+155+53	73	10	330+185+285	421	3100	4251
15Mts	440	210+230mm OPP bog + box			180+165+75	110	10	375+185+395	586	4400	6086
20Mts	560	210+230mm OPP bog + box			180+165+75	110	10	375+185+395	586	5600	7286
20Mts	570	200	80	156	212+212+85	165	10	460+230+440	883	5700	9743
25Mts	700	200	80	156	212+212+85	165	10	460+230+440	883	7000	11043
30Mts	830	200	80	156	212+212+85	165	10	460+230+440	883	8300	12343
35Mts	960	200	80	156	212+212+85	165	10	460+230+440	883	9600	13643
40Mts	1090	200	80	156	212+212+85	165	10	460+230+440	883	10900	14943
50Mts	1350	200	80	156	212+212+85	165	10	460+230+440	883	13500	17543
60Mts	1610	200	140	266	220+210+143	215	4	435+235+315	516	6440	8880
70Mts	1870	200	140	266	220+210+143	215	4	435+235+315	516	7480	9920
80Mts	2130	200	140	266	220+210+143	215	4	435+235+315	516	8520	10960
90Mts	2390	200	140	266	220+210+143	215	4	435+235+315	516	9560	12000
100Mts	2650	200	140	266	220+210+143	215	4	435+235+315	516	10600	13040

CONTACT

Mr. Joshi
Telephone: 98660 78472
Kalyani Chamanthi
Telephone: 99890 55981

Email: sales@av-visionindia.co.in
Website: www.av-visionindia.co.in

AV-VISION
EQUIPMENTS (INDIA) (P) LTD.