



PROJECTOR

# Pro8800WUL


## Key Features

Utilize Unique "Flex-In" Design Flexible Integration | Easy-Access Top Cover Ample space for maintenance | PortAll®: Secure MHL/HDMI port with built-in Micro USB cable Big dongle compartment | Cable Management Hood Neat exterior | 4-in-1 Power Button Easy-on control



## Product Description

Utilizing a unique "Flex-In" design, the Pro8800WUL integrates an intuitive form, high flexibility and an easy installation process, making it the ideal installation projector. Equipped with 5,200 ANSI Lumens and WUXGA resolution, the Pro8800WUL boasts a sleek top cover and an intuitive PortAll® compartment to accommodate HDBT, wireless dongle, or PC stick integration for versatile application, while the cable management and 4-in-1 power button embody a bold and futuristic design. Moreover, the 4 HDMI ports, and centered lens with multiple adjustment in vertical lens shift, 1.6x optical zoom, HV keystone (auto V), and 4-corner offer flexible and easy installation. Powered by SuperColor™ and SonicExpert®, the Pro8800WUL provides a professional audiovisual performance. The Pro8800WUL not only meets large venue Pro AV projection requirements, but is also more than enough for general high-brightness projection.

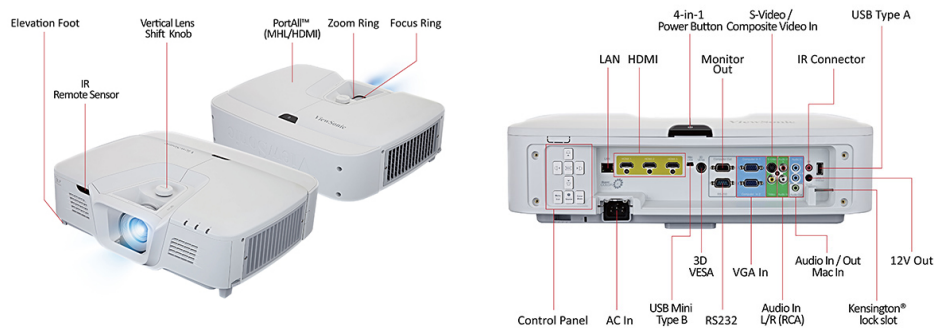

Visit Us  [www.viewsonic.com](http://www.viewsonic.com)

**PRODUCT SPECIFICATION**

Resolution:	1920x1200
Brightness (ANSI Lumens):	5200lm
Contrast (Max.):	5000: 1
Lamp Hour (Normal / Eco):	2000hrs / 2500hrs
Throw Ratio in Meters (Wide ~ Tele):	1.07~1.71
Lens Shift:	Yes
Optical Zoom:	1.6x
Digital Zoom:	0.8x~2.0x
Screen Size:	30"~300"
Projection Offset:	105%~110%±5%
Display Colours:	1.07 Billion Colors (30 bits per color)
Keystone:	HV
Noise min (Eco):	33 dB
Speaker:	10W Cube x 2

**INPUT CONNECTIVITY**

HDMI/MHL:	1
HDMI In:	3
VGA-in:	2
Component Input:	2 (Share with VGA-in)
S-Video:	1
Composite Input:	1
Audio-in (3.5mm):	2
Audio-in (RCA pair) L/R Set:	1
USB Type A:	1 (Only charging)
Mini USB:	1
Micro USB cable:	1 (Only charging)
Microphone in (3.5mm):	1 (Share with audio in 2)

**OUTPUT CONNECTIVITY**

VGA-out:	1
Audio-out (3.5mm):	1

**CONTROL**

RS232 (9 pin):	1
Network Mangment (LAN cable):	1
12V Power Trigger:	1
3D VESA:	1
IR Connector:	1

**DIMENSIONS AND POWER**

Dimension (WxDxH):	496.5 mm(W) x 316.24 mm(D) x 139.8 mm(H) 19.55" (W) x 12.45" (D) x 5.50" (H)
Net Weight:	6.3 kg (13.89 lb)
Power Source:	100~240Vac 50/60Hz
Power Consumption:	574W (Max.)

**SUPPLIED ACCESSORIES**

Power cord:	1
VGA cable:	1
Remote Control (with batteries):	1
Cable cover:	1
Quick Start Guide & CD:	1

**LANGUAGES**

On Screen Display:	Total 22 languages
--------------------	--------------------

**REGULATIONS**

Standard:	Mexico Energy test/Registration, EAC, TUVS, Mark(Argentina), India BIS, FCC,CE, EMC,CB,,CCC, ROHS, REACH, SVHC,WEEE, ErP, Mexico NOM, cTUVus, PSB,RCM, CECP
-----------	---