
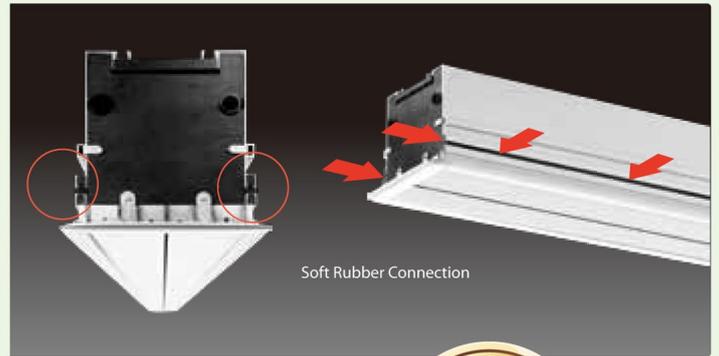


Recessed-ceiling Series

Projection Screen

- Aluminum alloy casing with stability and low weight.
- Recessed design integrated with ceiling decoration.
- Suitable for all types of ceilings.

Recessed ceiling screen features the "Separated Casing" patented technology that reduces noise and vibrations. This helps to eliminate the common noise problem caused by the friction between the screen casing and ceiling. This exclusive technology ensures that while the screen is completely hidden providing a seamless look there is no compromise in quality. This screen is designed to be recessed into the ceiling and is an ideal hidden solution for installations such as home cinema, office and conference rooms. The sturdy case boasts an easy to install yet functional design. The largest seamless size of this screen is 200"(4:3) or 200"(16:9). Tab-tension motorized and standard motorized applications are available in this recessed-ceiling design.

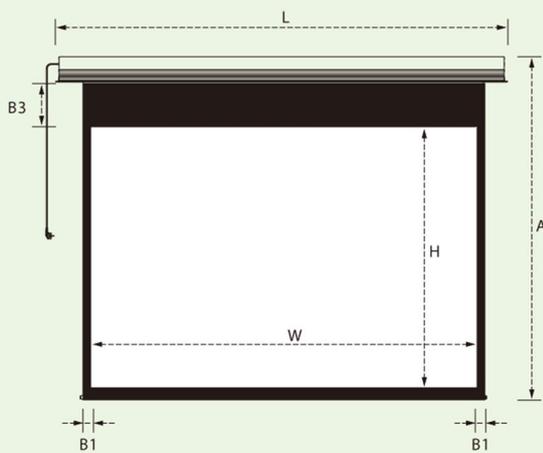

Revolutional Noiseless Solution

Separated Casing Patented Technology

Patent No: ZL200920238695.1



Specification (CB-MICKxxx)

Ratio	Size	Viewing Size	Retraction Height A	Top Black Border B3	Product Size	Net Weight	Voltage
	(Inch)	(W × H)			(L×H×W)		
4:3	72	1463×1097	2167	850	1852×161×170	20.0	115W
	84	1707×1280	2170	670	2136×161×170	24.0	115W
	100	2032×1524	2164	420	2527×161×170	26.6	115W
	120	2438×1829	2169	120	2867×161×170	29.3	115W
	150	3048×2286	2950	400	3667×161×170	35.4	115W
	180	3658×2743	3064	80	4147×161×170	46.2	160W
	200	4064×3048	3336	80	4553×161×170	50.5	160W
16:9	77	1705× 958	2169	990	2134×161×170	24.5	115W
	80	1771× 996	2166	950	2156×161×170	24.7	115W
	92	2037×1146	2166	800	2466×161×170	27.0	115W
	100	2214×1245	2165	700	2643×161×170	28.2	115W
	106	2347×1320	2170	630	2776×161×170	29.2	115W
	120	2656×1494	2105	450	3086×161×170	31.6	115W
	133	2944×1656	2297	400	3373×161×170	36.0	115W
	150	3321×1868	2409	300	3750×161×170	41.2	160W
	180	3984×2241	2782	300	4474×161×170	48.5	160W

Remark:

1. Recessed-Ceiling series, under 120" size with double ornament board, 120" or above the size with single ornament border.
2. For Tab-Tension series if recessed installation was necessary, ensure the oblong groove's Length, Height, Depth is separately more than 100mm, 60mm, 60mm of the product dimension. For well covering the groove with ornament board, Length and Depth need to be separately less than 10mm of product dimension if the groove's Height is over 250mm.

